




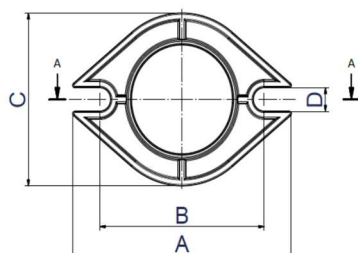

Schlauchflansch

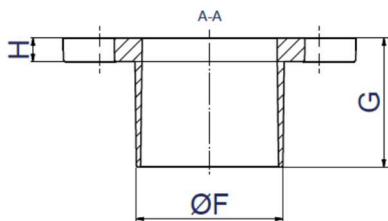

Ringverdichter SF

SF	A	B	C	D	Ø F	G	H	kg
Ø 40	84	62	60	10	40	50	9	0,1
Ø 50*	84	62	60	10	50	50	9	0,15
Ø 50	91	72	65	9	50	50	9	0,15
Ø 60	98	82	74	10	60	50	9	0,2
Ø 75	102	91	84	7	67	58	27	0,42
Ø 115	180	148	126	12	104	78	38	1,17

SF	A	2x	Verdichter-Baugröße
Ø 40	84	M6	WT4
Ø 50*	84	M6	WT4
Ø 50	91	M8	WT5 - 6
Ø 60	98	M8	WT5 - 6
Ø 75	102	M10	WT8
Ø 115	180	M12	WT9

Material + Montagezubehör

Anwendung:

- Für den Anschluss einer Schlauchleitung
- Saug- und Druckseitig einsetzbar


Material:

- Aluminiumdruckguss

Montagezubehör:

- 2 Stk. Schrauben Innensechskant
- 2 Stk. Unterlegscheiben
- 1 Stk. Gummiflächdichtung NBR

Schlauchflansch am Ringverdichter:



Schlauchflansch lose:

